


Container and Bracket Dimensional & Electrical Data



Model	HighPur HPS3208
Output Range	4-200 kg/h (8-440 lbs/h)
Operating pressure	85 bar (1,232 psi)
Dimensions	A x B x C 600 x 400 x 400 mm 23.6 x 15.8 x 15.8 inches
Clearances	Top 50 cm (20 inches) Left 40 cm (16 inches) Right 20 cm (8 inches) Bottom 120 cm (48 inches) To allow for plumbing.
Weight	52 kg 114.4 lbs
Operating voltage	208 VAC / 3P / 15 Amp Breaker Required
Power consumption	920 W
Usage	Indoor Use Only
Altitude above mean sea level	Max 6,670 ft
Ambient temperature	7-35°C (45-95°F)
Ambient humidity	Max. 80 %, avoid condensation

Wiring Diagram

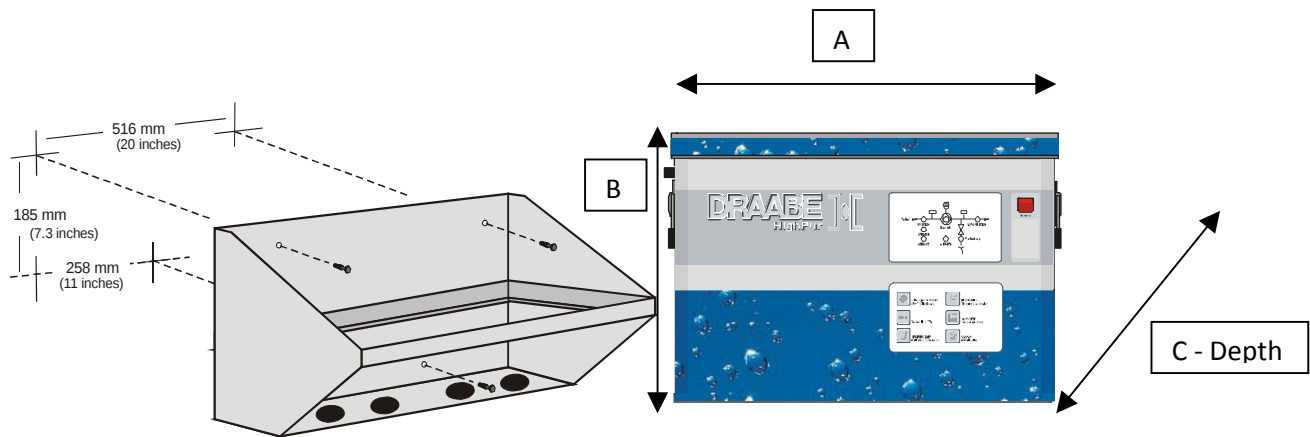